

BRMMBTA92Q

Rev.A Apr.-2022

描述 / Descriptions

SOT-23 塑封封装 PNP 半导体三极管。Silicon PNP transistor in a SOT-23 Plastic Package.

特征 / Features

耐压高,饱和压降低,集电极输出电容低,与 BRMMBTA42Q 互补,符合 AEC-Q101 标准高可靠性要求,无卤产品。


High voltage, low saturation voltage, low collector output capacitance, complementary pair with BRMMBTA42Q, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

用途 / Applications

高电压控制电路,满足汽车应用的严格要求。

High voltage control circuit, Meet the stringent requirements of automotive applications.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1 : Base PIN 2 : Emitter PIN 3 : Collector

印章代码 / Marking

h_{FE} Range	>40
Marking	Q2D





极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Collector to Base Voltage	V_{CB0}	-300	V
Collector to Emitter Voltage	V_{CEO}	-300	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-500	mA
Collector Power Dissipation	P_C	350	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Collector to Base Breakdown Voltage	V_{CB0}	$I_C=-100\mu A$ $I_E=0$	-300			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=-1.0mA$ $I_B=0$	-300			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=-100\mu A$ $I_C=0$	-5.0			V
Collector Cut-Off Current	I_{CB0}	$V_{CB}=-200V$ $I_E=0$			-0.25	μA
Emitter Base Cut-Off Current	I_{EBO}	$V_{BE}=-3.0V$ $I_C=0$			-0.1	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-10V$ $I_C=-10mA$	40			
	$h_{FE(2)}$	$V_{CE}=-10V$ $I_C=-30mA$	25			
	$h_{FE(3)}$	$V_{CE}=-10V$ $I_C=-1.0mA$	25			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-20mA$ $I_B=-2.0mA$			-0.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-20mA$ $I_B=-2.0mA$			-0.9	V
Transition Frequency	f_T	$I_C=-10mA$ $f=100MHz$ $V_{CE}=-20V$	50			MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=-20V$ $f=1.0MHz$ $I_E=0$			6.0	pF


电参数曲线图 / Electrical Characteristic Curve

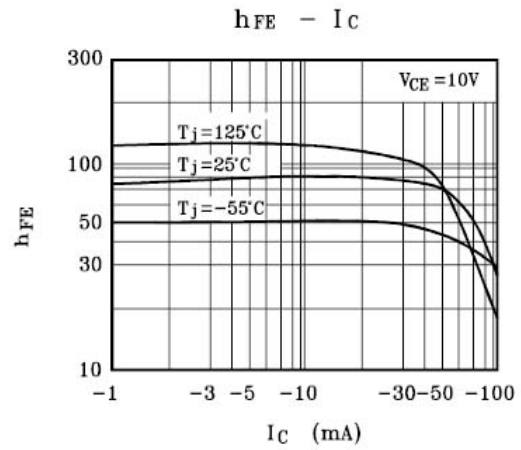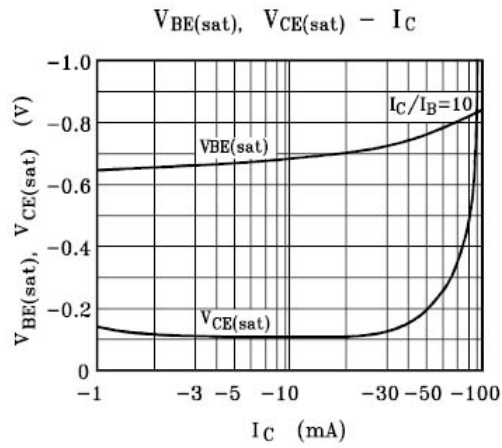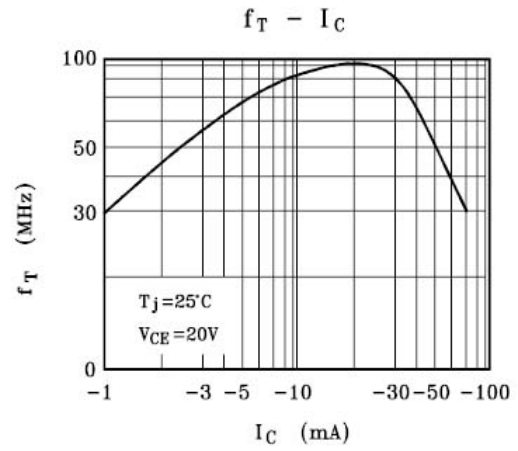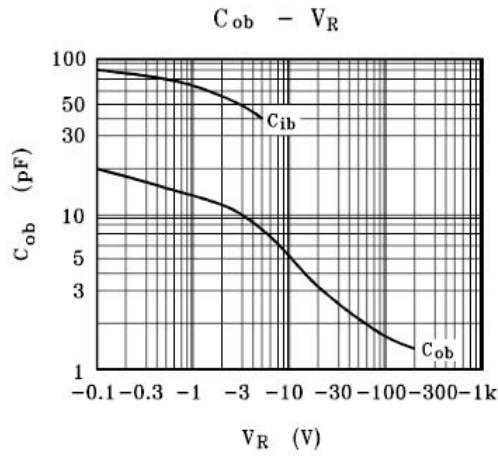


外形尺寸图 / Package Dimensions

SOT-23

单位: mm

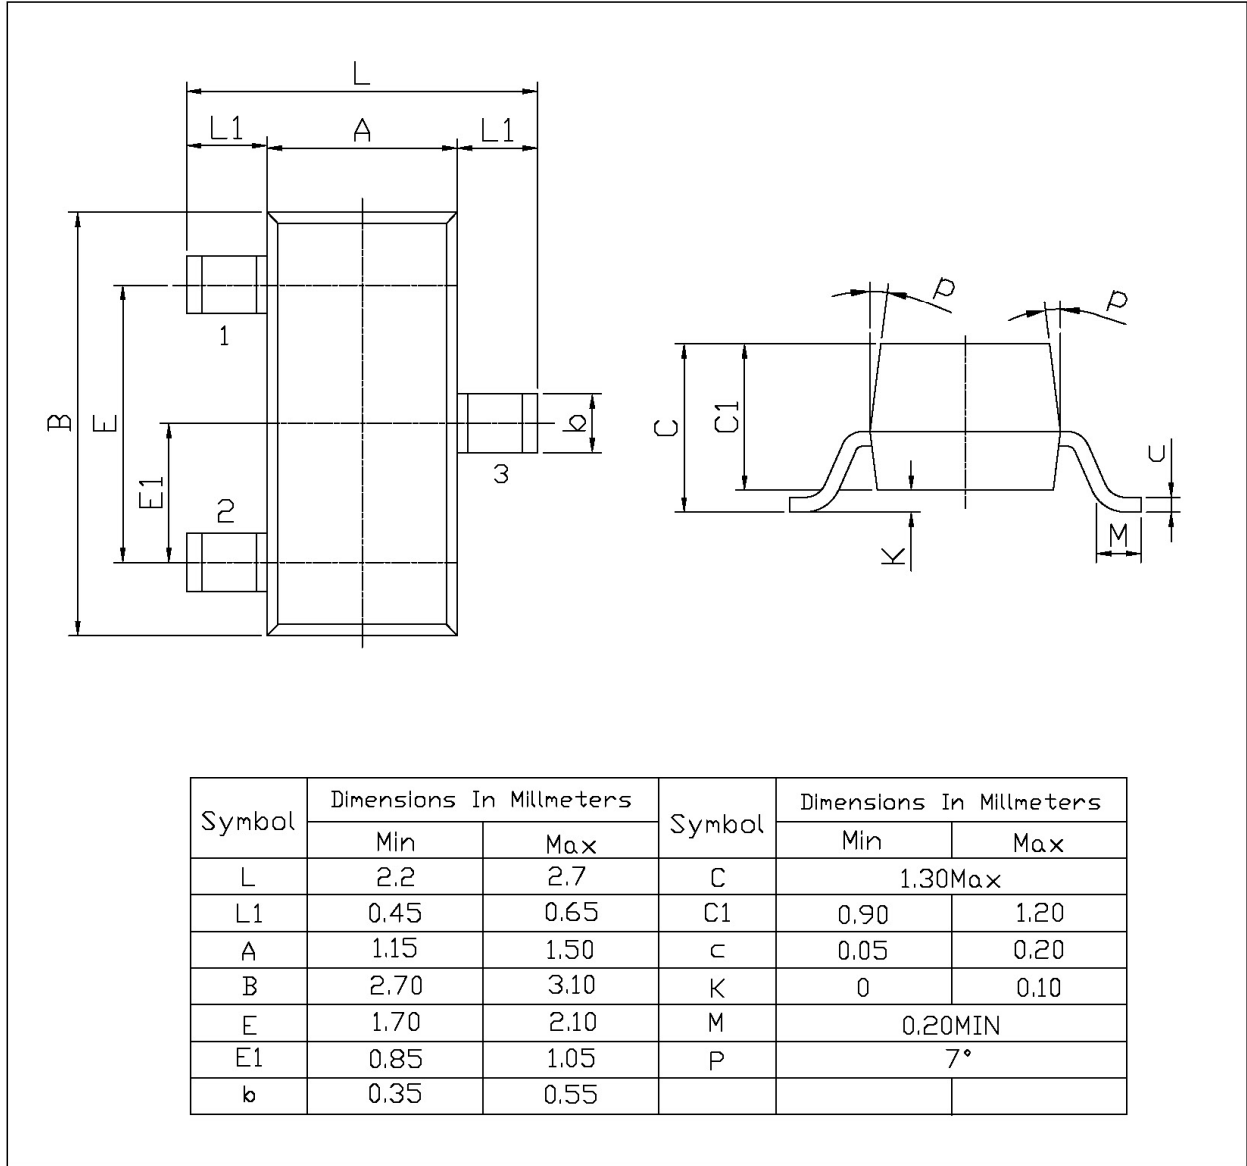

印章说明 / Marking Instructions

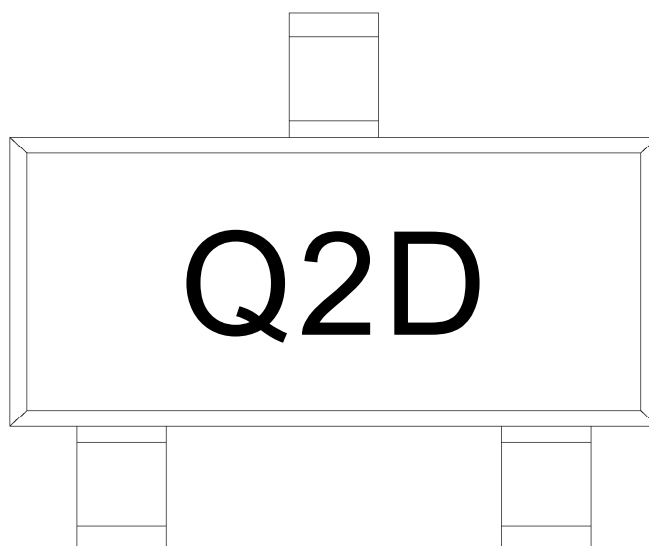

说明：


Q： 为汽车无卤产品标识

2D： 为型号代码

Note:

Q: Automobile halogen-free product Code

2D: Product Type Code.

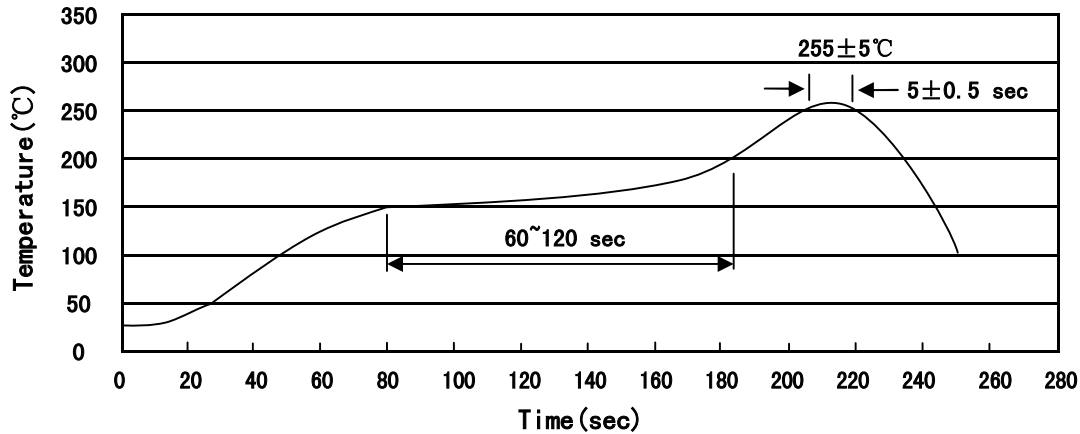回流焊温度曲线图(无铅) / Temperature Profile for IR Reflow Soldering(Pb-Free)


说明：

- 1、预热温度 $150 \sim 200^\circ\text{C}$ ，时间 $60 \sim 120\text{sec}$;
- 2、峰值温度 $255 \pm 5^\circ\text{C}$ ，时间持续为 $5 \pm 0.5\text{sec}$;
- 3、焊接制程冷却速度为 $2 \sim 10^\circ\text{C}/\text{sec}$.

Note:

- 1.Preheating: $150 \sim 200^\circ\text{C}$, Time: $60 \sim 120\text{sec}$.
- 2.Peak Temp.: $255 \pm 5^\circ\text{C}$, Duration: $5 \pm 0.5\text{sec}$.
3. Cooling Speed: $2 \sim 10^\circ\text{C}/\text{sec}$.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions
温度： $260 \pm 5^\circ\text{C}$ 时间： 10 ± 1 sec.Temp.: $260 \pm 5^\circ\text{C}$ Time: 10 ± 1 sec
包装规格 / Packaging SPEC.

卷盘包装 / REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm^3)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" × 8	180×120×180	390×385×205

使用说明 / Notices